

Exceeding expectations when the pressure's on

Specially formulated for self-adhesive coatings, closures, tapes and labelstock with permanent and removeable adhesives, our pressure sensitive hot melt adhesives deliver exceptional performance, time after time.

Pressen® hot melt adhesives are tailor-made and application specific to provide high tensile strength, exceptional tack levels, high and low peel adhesion, clarity and UV resistance, whilst handling temperatures from -40°C to +100°C.



From bags to bugs; and everything in between. Widely used around the globe, our Pressen pressure sensitive hot melt adhesives are used in the production of:

- > Self-adhesive labels | permanent or removeable
- > Self-adhesive tapes | permanent or removeable
- > Self-adhesive closures and tear strips
- > Insulation materials
- > Security bag sealing and mail order closures
- > Self-adhesive films for graphic arts panels
- > Pest Control Systems
- > Alkali washable tapes and labels

Devoted to development

Ahead of their time, Pressen hot melts are formulated to achieve the highest levels of performance. They are manufactured on state-of-the-art, modern production equipment; backed by a specialist research and development laboratory that is wholly devoted to meeting your needs and success.

At Beardow Adams, we have an in-house coating facility that is on hand for in-depth evaluations and to enhance the service to our customers. Pressen benefits include:

- > Use on high-speed, in-line coating
- > Label grades formulated for clean and easy die cutting operations
- > Permanent or temporary bonds – high or low peel adhesion
- > High tensile strengths
- > High bio-based content options
- > MOSH / MOAH free and alkali washable products
- > Adhesives that perform from -40°C to +100°C
- > Products suitable for food contact
- > Long storage life of coated adhesive

For ease of handling, Beardow Adams hot melt pressure sensitive adhesives are available in many different forms, from EcoBlock® to drums, dependent on your requirements.

Using BAMClean hot melt cleaners in combination with Pressen hot melt adhesives, will extend the life of your application equipment, reduce your maintenance costs and help towards maximizing your production efficiencies.

BEARDOW ADAMS™

Unique Adhesives



32 Blundells Road, Bradville, Milton Keynes, MK13 7HF, United Kingdom

T: +44 (0) 1908 574000 E: marketing@beardowadams.com W: www.beardowadams.com



Paniker S.L.

Crta. Sta. Creu de Calafell, 68
08830 Sant Boi del Llobregat
Barcelona, Spain
T: +34 936 402 116



Beardow Adams, Inc.

3034 Horseshoe Lane,
Charlotte, NC 28208, USA
T: +1 704 359 8443



Beardow Adams GmbH

Vibeler Landstrasse 20,
D - 60386 Frankfurt / Main,
Deutschland
T: +49 69 401040



Beardow Adams AB

Gasverksgaten 3, SE-261 35
Landskrona, Sweden
T: +46 418 39 51 00



Beardow Adams do Brasil Adesivos

Av. Das Nações Unidas 14.171
Marble Tower, 15* andar,
Chácara Santo Antônio
CEP 04794-000 São Paulo, SP, Brazil
T: +55 11 3568 2329



Beardow Adams SAS


CRA 13 # 38-65
OF 1003
Bogotá
Colombia
T: +57 1 466 0419



Hot Melt Pressure Sensitive Adhesives

BEARDOW ADAMS™

Unique Adhesives

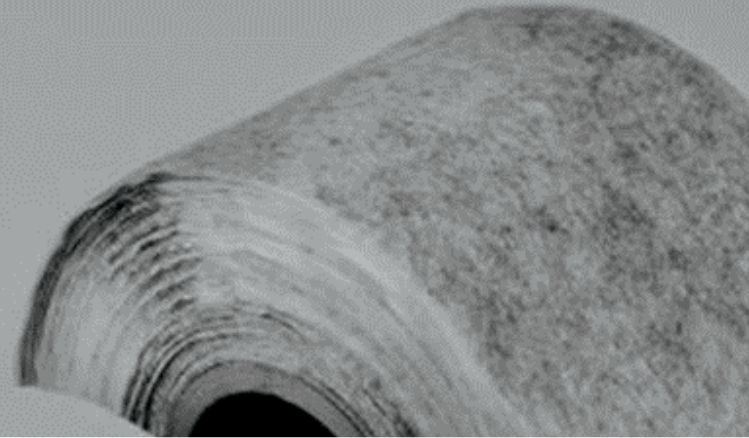

Labelstock:

Pressen 2228

- No penetration on paper face stocks
- Food contact
- Clean die-cutting
- High heat resistance
- Suitable for no-label look

Pressen 2319

- Paper or filmic labelstocks
- No staining / bleed through
- General purpose
- Clean die-cutting


*Filled option available
Pressen 2319F

Pressen 2007

- Filmic label stocks
- Tyre labels
- Ultra high tack
- High and low temperature resistance

Pressen 2399

- No penetration on paper face stocks
- Food contact
- Clean die-cutting
- High heat resistance
- Suitable for no-label look

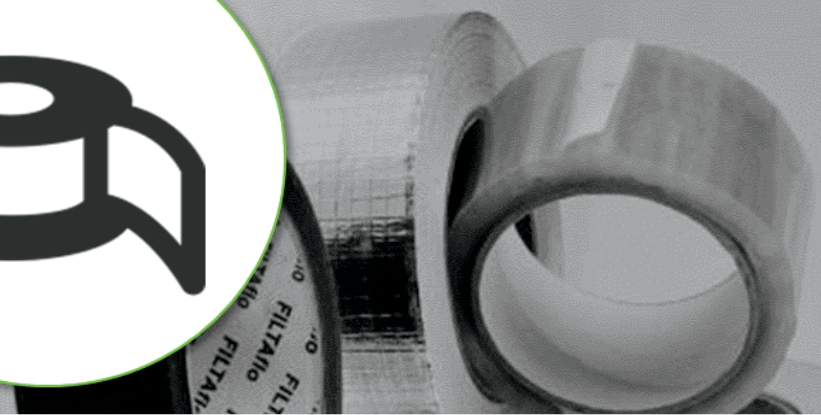

Tapes:

Pressen 1725A

- High heat resistance
- Good adhesion to basic substrates
- General purpose

Pressen 1968

- High tack
- Adhesion to difficult surfaces
- Excellent quick-stick properties

Pressen 2254

- High tack
- Food contact
- Adhesion to difficult surfaces

Pressen 2039

- Excellent all round performance
- Light coloured & low odour
- High shear & heat resistance



Flexible & rigid packaging:

Pressen 1968

- Bag & security sealing
- Difficult film surfaces
- High tack
- Low temperature performance

Pressen 2362

- Online cardboard packaging applications
- High tack
- Good adhesion to cardboard
- Temperature resistance
- High tack

Pressen 1790

- Documents enclosed (transport) wallets
- Permanent bond
- High tac and adhesion
- Exceptional coating characteristics on wide width